

# CIR-SR27GRC


## 2 Mega Pixel CVI Camera



### FEATURES

- 1/2.9" 2.1 Mega Pixels SONY CMOS
- support four video singnal output(AHD/TVI/CVI/CVBS), default video output is CVI
- Support Dip switch for signal changes
- 40PCs IR LEDs,IR Range: 15~20M (49.2~ 65.6ft) (Outdoor)
- 2.8-12mm Varifocal IR Lens,Viewing angle: Horizontal: 90°~28°
- Feature:Defog, WDR,3DNR,DSS,UTC

### DIMENSION

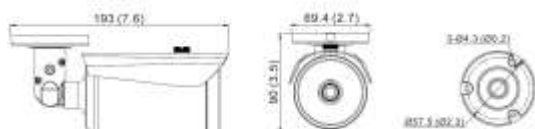

### SPECIFICATIONS

CIR- SR27GRC	
IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/2.9" 2.1 Mega Pixels SONY CMOS
Pixels	1920(H)*1080(V)
Horizontal Resolution	1080P
Viewing Angle	Horizontal: 90°- 28°
Minimum Lux	0Lux(40PCs IR LEDs ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥52dB
Electronic Shutter	NTSC:1/60-1/100,000S PAL:1/50-1/100,000S
Lens	2.8-12mm Varifocal IR Lens
White Balance	ATW
OSD	YES
BackLight Compensation	AUTO
SENS-UP	ON
IR SMART	ON
SMART NR	ON/OFF
3D/2D	ON
WDR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	15-20M ( 49.2~ 65.6ft )
Gamma	0.45
Video Output	HD-CVI ( AHD / TVI / CVBS)
Power Supply	DC12V±10%
Current consumption	420mA (MAX)
Dimension	193×69.4×90mm ( 7.6" ×2.7×3.5" )
Weight	530g ( 18.7oz )
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C

4-6F No.5 Lane 130, Min-Chung Road, Hsin Tien City, Taiwan  
 Room B 3rd Building of Kin On Commercial Building, Nos.51 Jervois Street, Sheung Wan, Hong Kong  
 3rd~5th Floor, 2A Building, Huihao Industrial Park, He Shui Kou, Gongming, Shenzhen, China

[www.irlab.net](http://www.irlab.net)      [info@irlab.net](mailto:info@irlab.net)

Copyright@IRLAB Limited. All rights reserved.