

## DS-D6043UL-B/S Standing Digital Signage



- **Metallic Appearance** Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- **Exquisite Image** Industrial A+ interface, auto-coloring and image-enhancing engine.
- **Variable Materials** Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.
- **Flexible Program Schedule** Free schedule and district display of multiple materials. Multiple play modes with customization support.
- **Centralized Management** Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview. Remote program release and local (USB) program update.
- **Organization Permission** 5-level organization available for managing materials, programs, terminals, and users. Create custom user with precise permission assignment. Multiple permission templates available.
- **Multiple Security Safeguards** 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying. Encryption of data storage and transmission to avoid data tampering. With no default password, users can activate and set initial password to guarantee the password safety.




## ▪ Specification

	Model	DS-D6043UL-B/S
<b>Display</b>	Viewing Angle	178°(H) /178°(V)
	Contrast Ratio	5000:1
	Screen Size	42.5 inch
	Active Display Area	941.184(H)mm x 529.416(V)mm
	Backlight	D-LED
	Pixel Pitch	0.2451(H) mm x 0.2451(V)mm
	Resolution	3840 × 2160
	Brightness	500 cd/m <sup>2</sup>
	Color Depth	8bit+FRC
	Response Time	6.5 ms
	Color Gamut	72% NTSC
	Reliability	7 × 24 H
	Refresh Rate	60 Hz
<b>Built-in System</b>	Operation System	Android 8.1.0
	Processor	Cortex-A17, 4-core, main frequency 1.6 GHz
	Memory	2 GB
	Built-in Storage	16 GB EMMC
<b>Interface</b>	Video & Audio Input	AUDIO IN × 1, HDMI IN × 2, VGA IN × 1
	Video & Audio Output	AUDIO OUT × 1
	Network Interface	LAN × 1, Wi-Fi
	Data Transmission Interface	USB 2.0 × 2, BT 4.2 × 1
<b>Internal Function</b>	Loudspeaker	2 × built-in speaker, 8 Ω 5 W
<b>Working Environment</b>	Storage Temperature	10% to 80%
	Storage Humidity	5% to 90% RH
<b>General</b>	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 150W
	Standby Consumption	<0.5W
	Working temperature	0 °C to 40 °C (32°F to 104 °F)
	Working humidity	10%~80% RH
	Product Dimensions (W × H × D)	Without base: 585.14 mm × 1705.79 mm × 55 mm (23.05" × 67.21" × 2.17") With base: 585.14 mm × 1767.29 mm × 450 mm (23.05" × 69.63" × 17.73").
	Package Dimensions (W × H × D)	1935 mm× 765 mm × 303 mm (76.18" × 30.12" × 11.93")
	Net weight	48.46 kg (106.84 lb.)
	Gross weight	63.46 kg (139.91 lb.)
	Packing List	Screen, Base, Key, Screw Kit, Installation Manual

## Available Model

DS-D6043UL-B/S

## Dimension

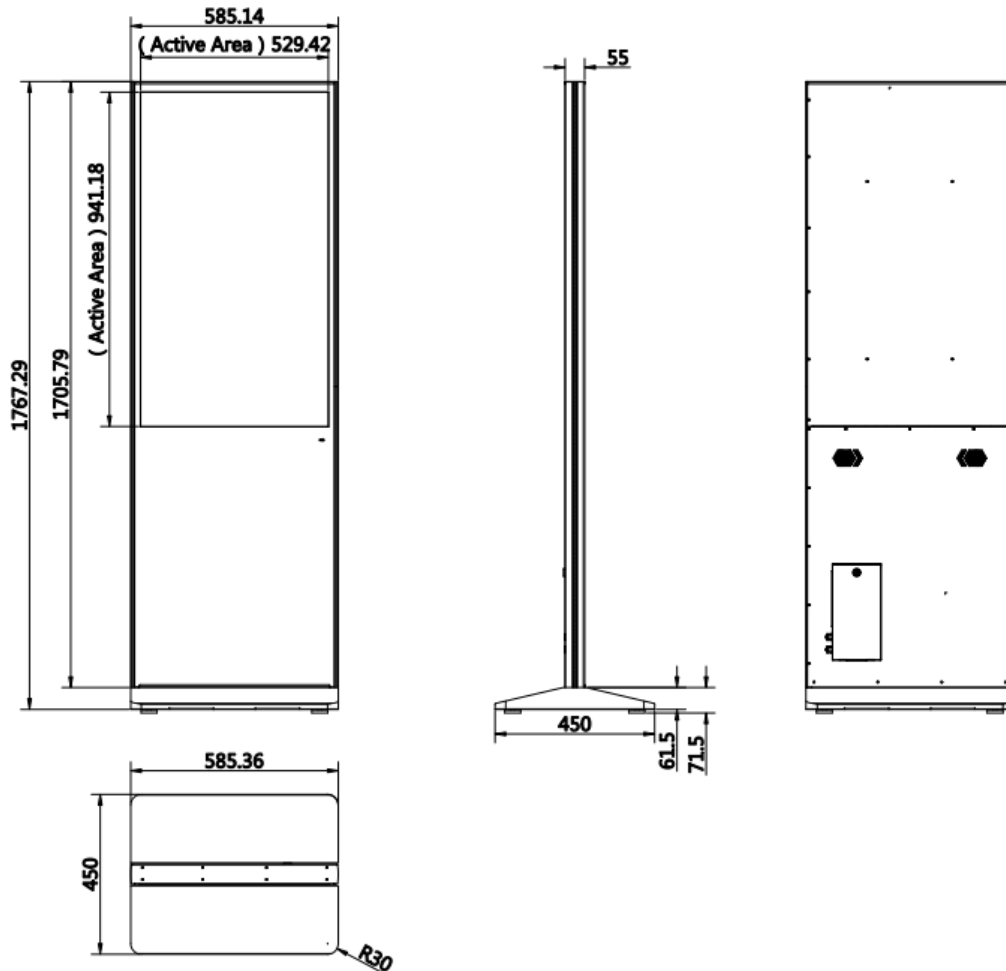

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com